


# NIRPlus™


## RETRO-REFLECTIVE PHOTOEYE

### NIRPlus™ Retro-Reflective Photoeye

- Flexible Voltage:  
12V AC/DC to 230V AC  
28mA Current Draw Standby  
15mA Current Draw Detect
- Watertight Package for Reliable  
Outdoor Installation
- 6 Feet Cable
- 45 Feet Range
- Two LED Indicators
- Sensitivity Adjustment
- Compact Size: 2" High,  
2" Deep, 0.70" Wide
- Relay Output: 3A 24V  
1A 220V Normally Energized

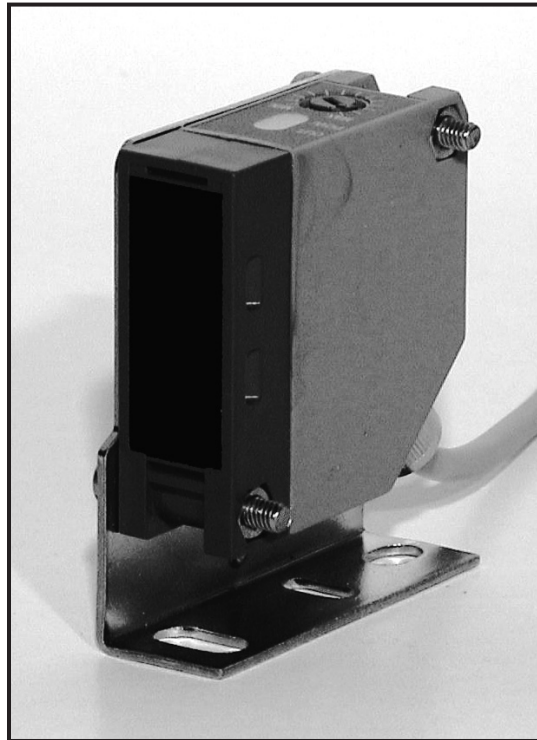


NIRPlus™



BRACKET

### ACCESSORIES



REFLECTOR



REFLECTOR HOOD



HOOD

### EMX Industries, Inc.

4564 Johnston Parkway  
Cleveland, Ohio 44128

Telephone:

1-800-426-9912 or  
216-518-9888

Fax: 216-518-9884

Email: [salesupport@emxinc.com](mailto:salesupport@emxinc.com)

Web: [www.emxinc.com](http://www.emxinc.com)

**EMX**  
INDUSTRIES, INC.

## FEATURES

**RANGE** The NIRPlus™ has an extended range of 45 feet providing better performance in rain and snow.

**LOW CURRENT** In addition, the low current draw of only 28mA makes the NIRPlus™ an excellent choice for solar and low voltage applications

**PROTECTION** The watertight package and an optional protective hood offers protection for the NIRPlus™ from the elements and vandalism.

**RELIABILITY** The output relay is normally energized, and should the NIRPlus™ photoeye lose power it will fail into detect mode.

**INSTALLATION** The installation hardware, bracket and instructions are included.