


# How To Setup APP To Work With Platinum Wi-Fi Gate Opener

## Android Phone Administrator:

### How To Reset The Wi-Fi Gate Opener Device:

1. Power up the Wi-Fi Gate Opener device.
2. Wait for 6 seconds. Next Press down and hold the **TEST** switch for 18 seconds to reset the Wi-Fi gate Opener device.
3. Turn the Wi-Fi gate opener power OFF for 5 seconds, then power up the Wi-Fi gate opener device. The reset process is completed. Turn Off the unit power.


### Setting Up the Wi-Fi gate Opener Device

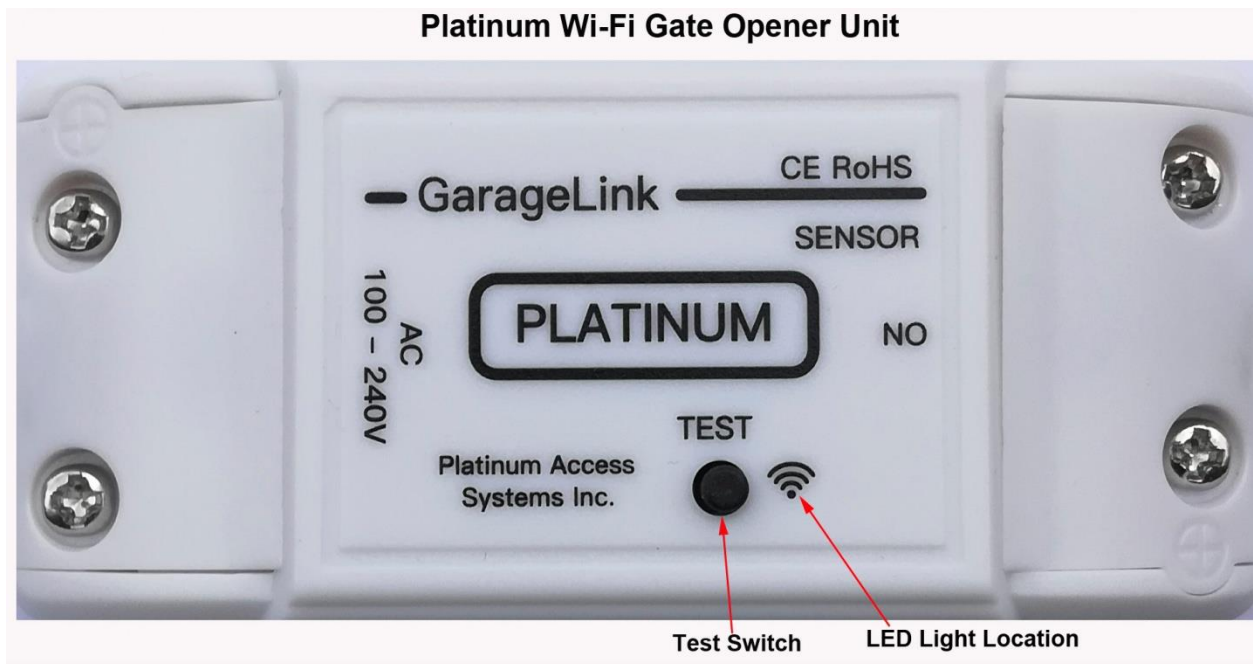


1. First open an account with Google to have an email account with google such [XXXX@gmail.com](mailto:XXXX@gmail.com), or enter your cell phone. And also setup a password too. Using your


phone number to set up an account with Google is better in this case since you may need to get a verification code from Google.

2. For Iphone user. You need to open an account with Icloud such [www.icloud.com](http://www.icloud.com). Create a password. You can use your cell phone number to create an account with Apple too.
3. Go to **Google Play Store/Iphone APP Store** to download **Smart Life APP**.
4. Install the APP. The APP will ask you to login. Then you can use the account that you have just created to login. Enter your cell phone number first to get a verification Code for login.
5. Once you have received your verification code. You enter the verification code. Then the APP will open the Smart Life home page.
6. Next Launch APP.


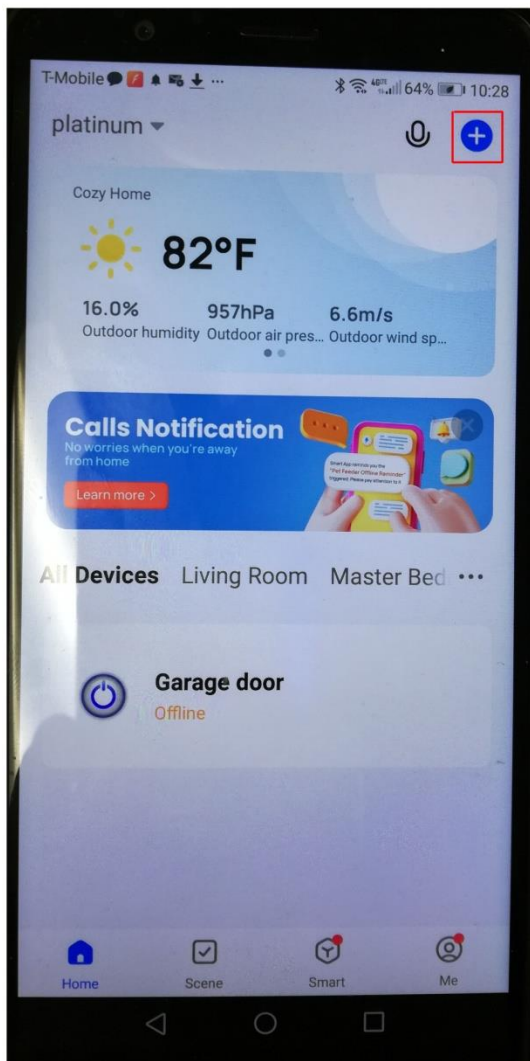


7. Tap the icon “+” at the upper right corner.
8. Power up the WIFI gate opener unit.

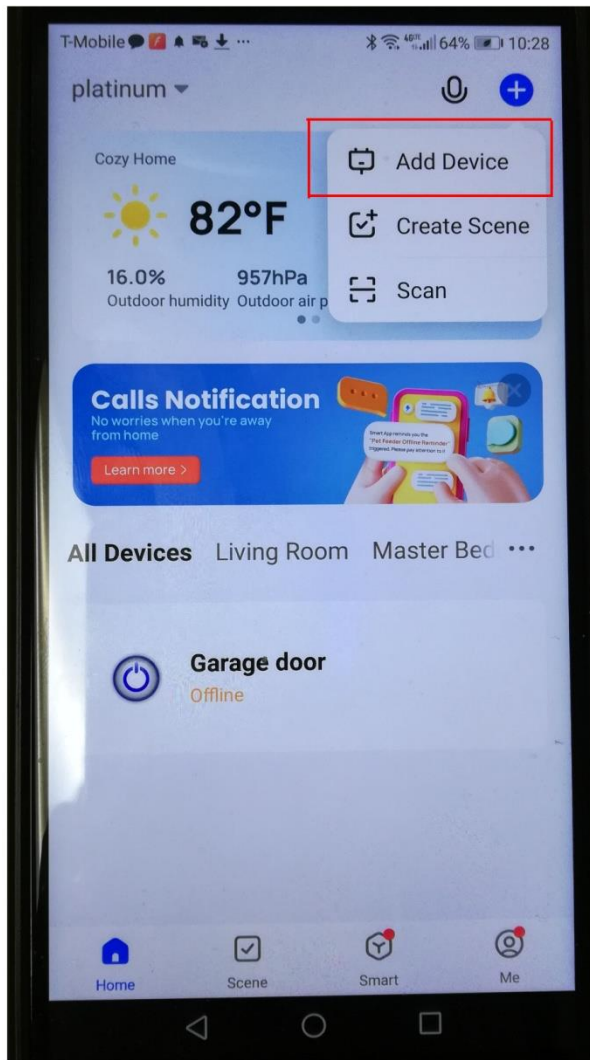


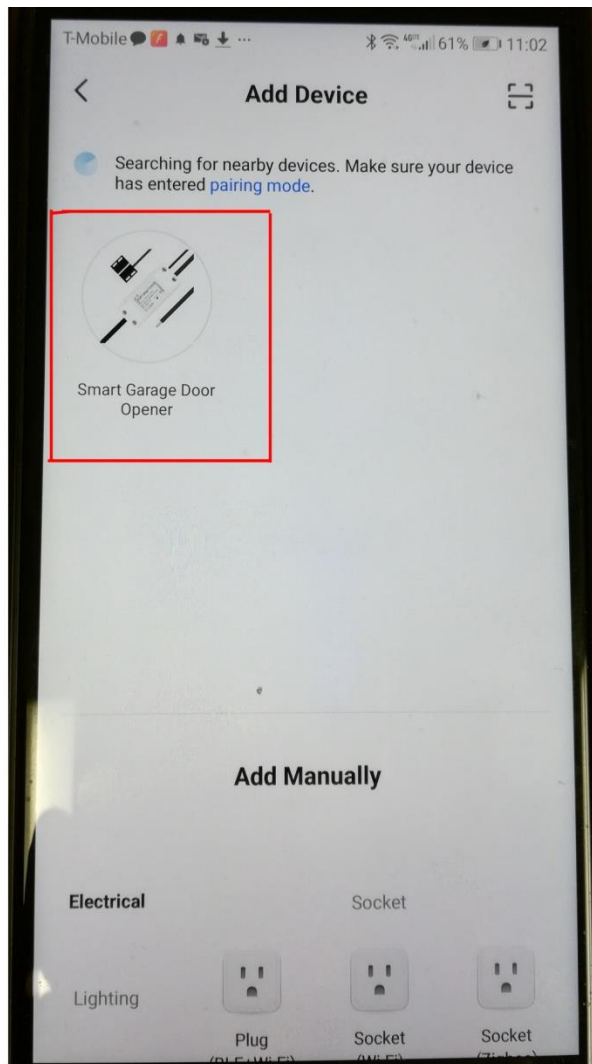

9. Tap **"Add Device"** to go to pairing the Phone and the Wi-Fi Device process.
10. The Red LED light is flashing. Wait for the **"Smart Garage Door Opener"** icon comes up.
11. Next tap **"Smart garage Door Opener"** Icon. Then **"Enter Wi-Fi Information"** screen comes up. Now enter your home Wi-Fi name and password
12. Next turn the Wi-Fi gate opener power OFF for 5 seconds, then power up the Wi-Fi gate opener device. Bring your phone close to the Wi-Fi unit.
13. Wait for 5 seconds. Then Tap **"Next"** icon. Now pairing process begin.
14. The pairing process will take from 15 seconds to 45 seconds.

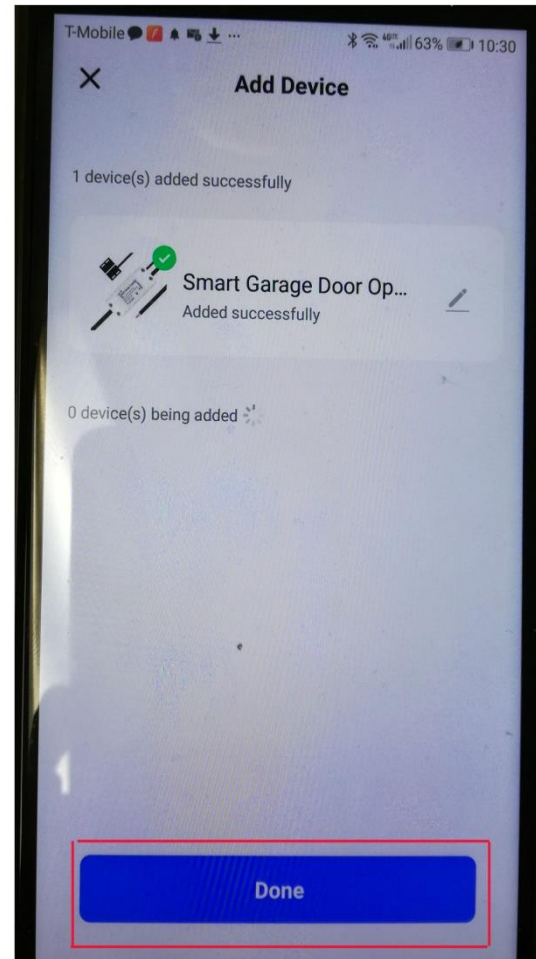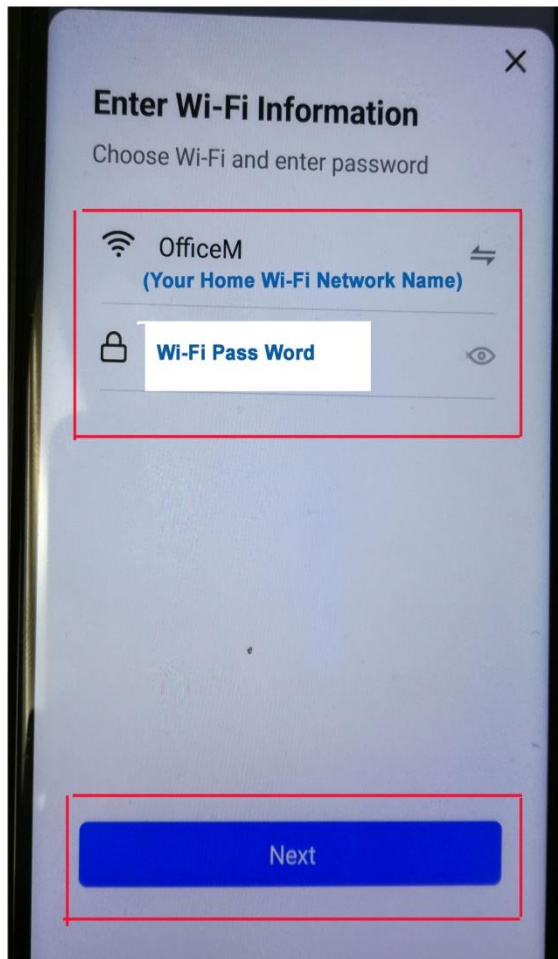



15. Once pairing is successful. You will see the **Add Device** screen comes up.
16. Tap “**Done**” icon on the **Add Device** screen. Then you enter to the **Smart garage Door Opener** home page.

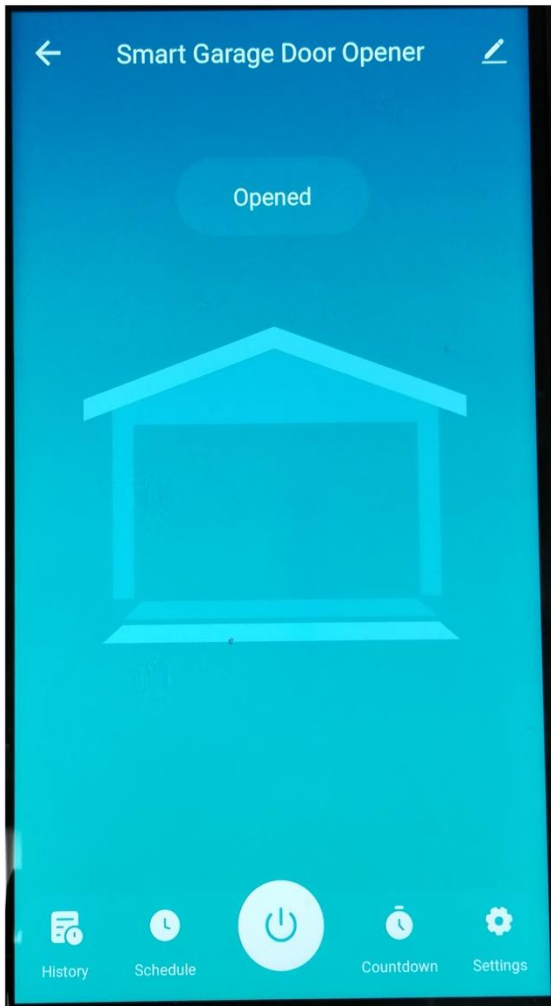

17. If failed to pair them up. Then you need turn OFF the Wi-Fi Gate opener power for 5 seconds, then power it back up again, then repeat start from Step 7 to Step 16 until you can successfully pair the Wi-Fi Gate Opener with your phone. Sometime it may need a couple of tries in order to pair both units successfully since there might be more than two Wi-Fi systems near your location.
18. If you need to add more Platinum Wi-Fi Gate Opener to this Smart Life APP for your phone, just repeat start from step 7 to Step 16.
19. You may need to add a Wi-Fi range extender if the Platinum Wi-Fi Gate Opener is far away from your Wi-Fi router.
20. Google Wi-Fi AC1200 Dual-Band Mesh Wi-Fi System & N300 Extender **are the best Wi-Fi routers & extender we recommend to use with Platinum Wi-Fi Gate Opener. If you need to extend the Wi-Fi signal range, all you need to do is to add one more Google Wi-Fi AC1200 router, or extender unit(s).**

## How To Delete WI-FI Gate Opener Device

1. Go to **Smart Garage Door Opener** Home page. Tap step back arrow on left upper corner go to **Add Device** page.

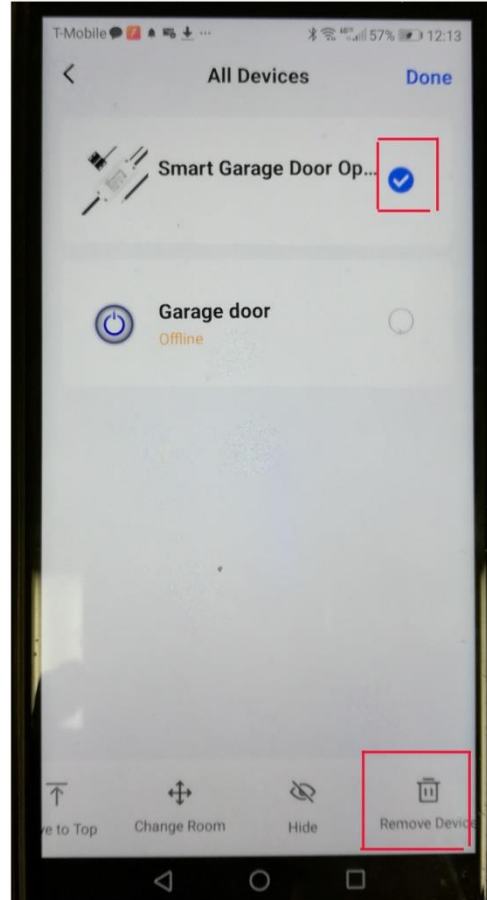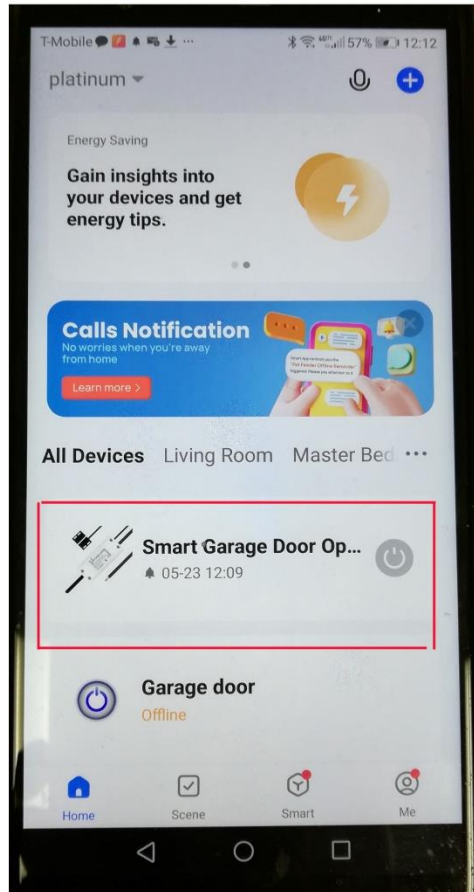



2. Press and hold "**WI-FI Opener**" unit for 3 seconds go to **All Devices** page.
3. Check the Wi-Fi Opener unit that you want to delete. Tap Icon "**Remove Device**" at the bottom right corner to delete the Wi-Fi Opener unit.

# Platinum WI-Fi Gate Opener



## How To Add Users


1. Open Smart Life APP
2. Press **Me** Icon once.

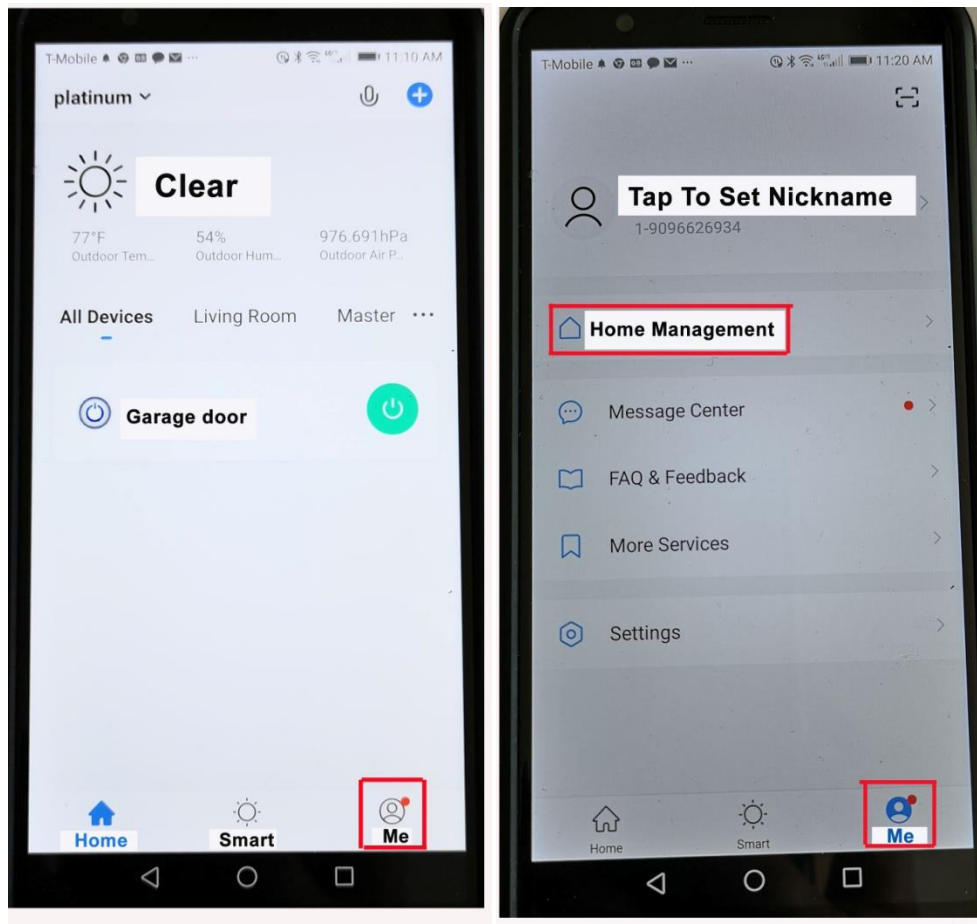


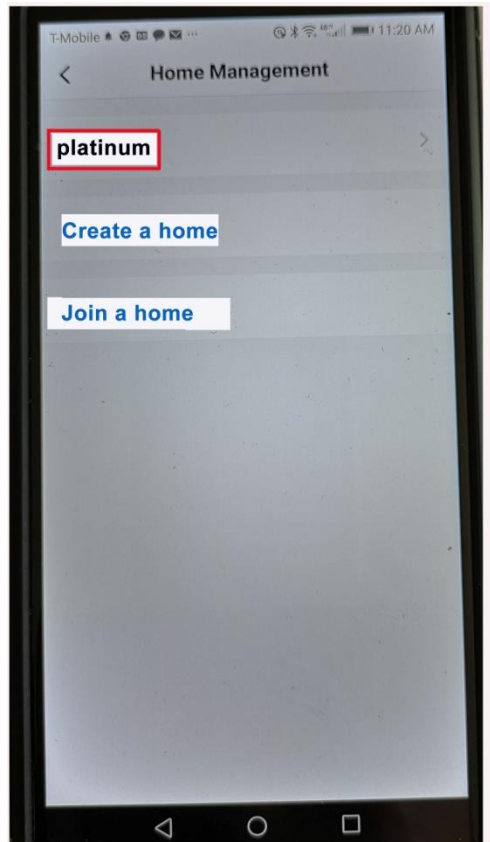



3. Press **Home Management** Icon once
4. Press Family Name Icon once(The Family name is **platinum** in this example).

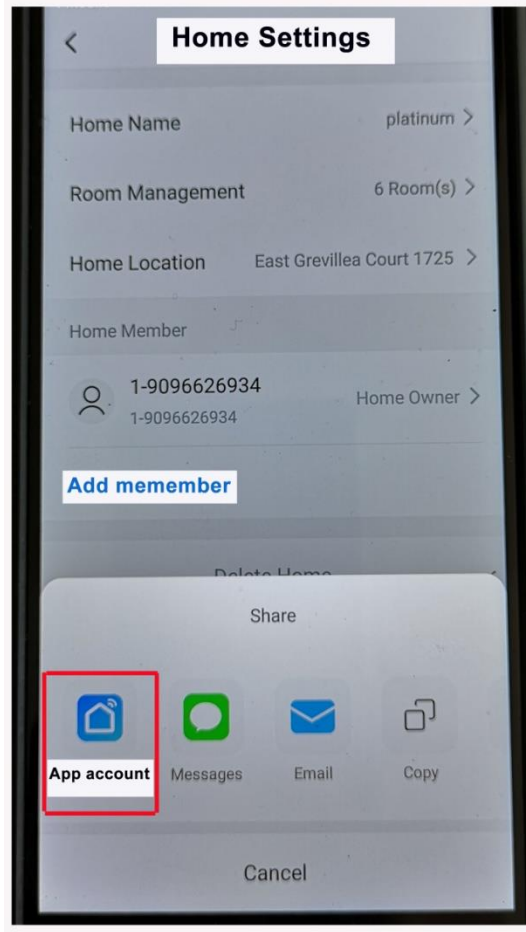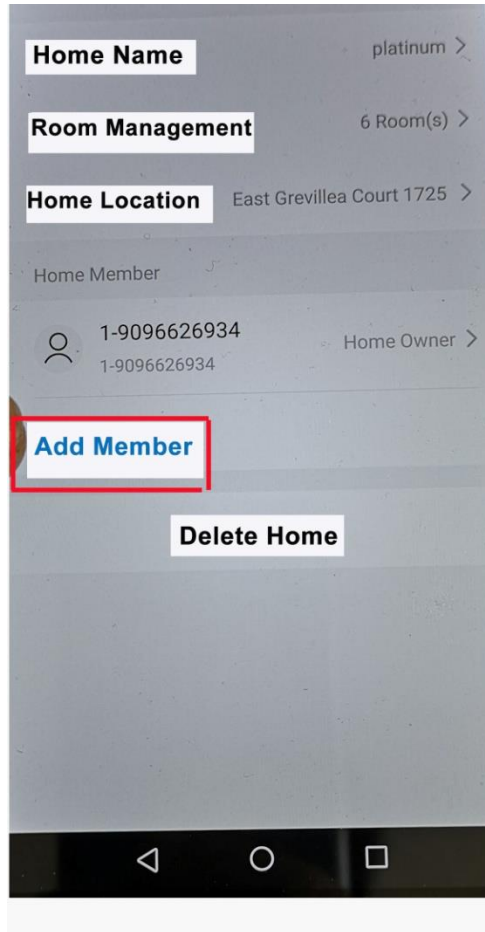


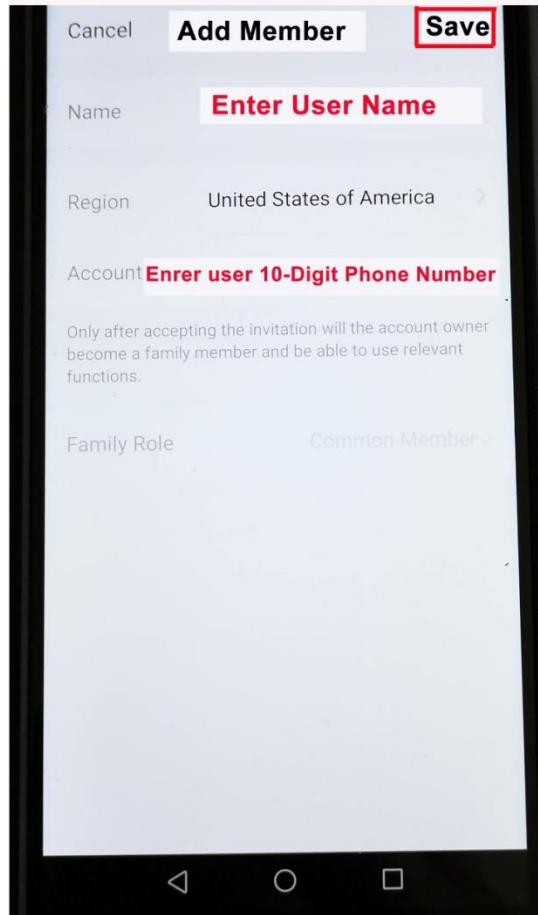

5. Tap **Add Member** Icon Once. Next tap **App account** icon.
6. Enter new User name for Name.
7. Enter 10-digit new user phone number(Make sure do not set the new user as an administrator. You can also add Administrators for family members by activate the Administrator when add new user).
8. Press **Save** Icon to send an invitation to this new user.
9. New user needs to install Smart Life APP in his phone.
10. Next the new user need to tap **Me** icon.

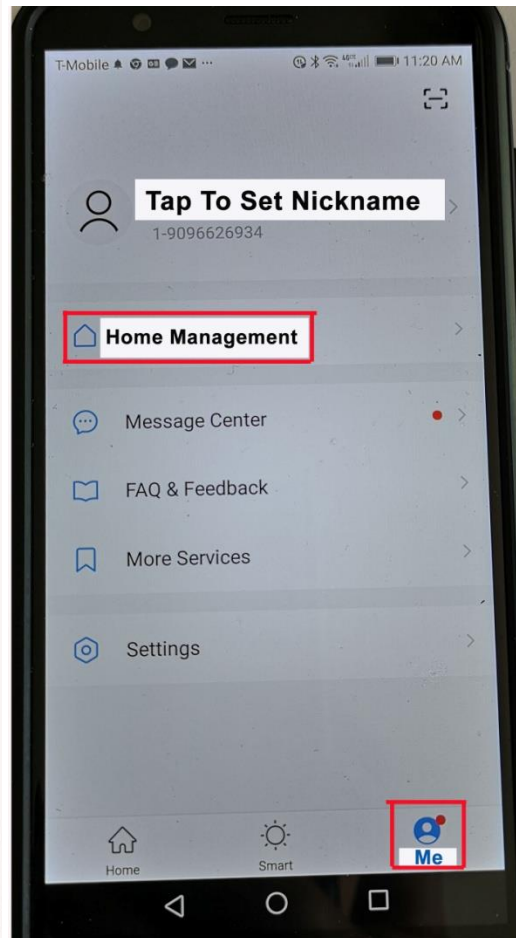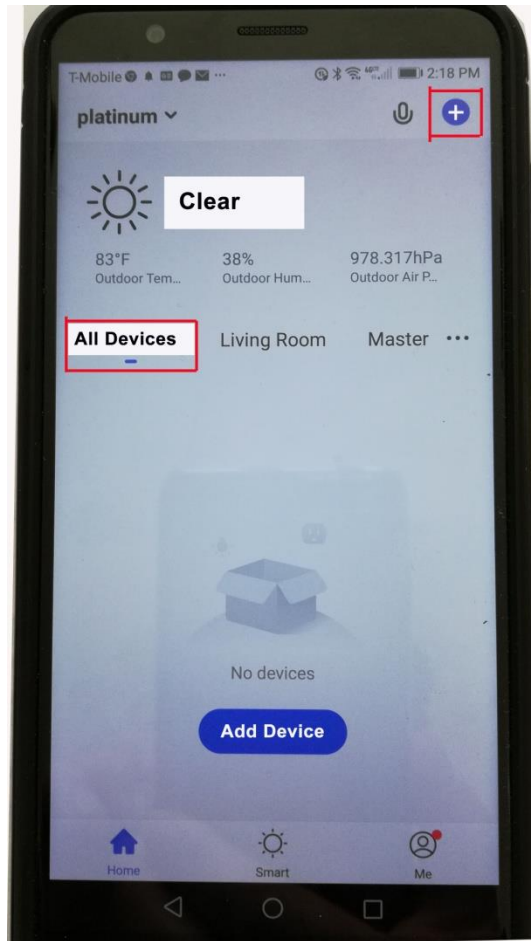

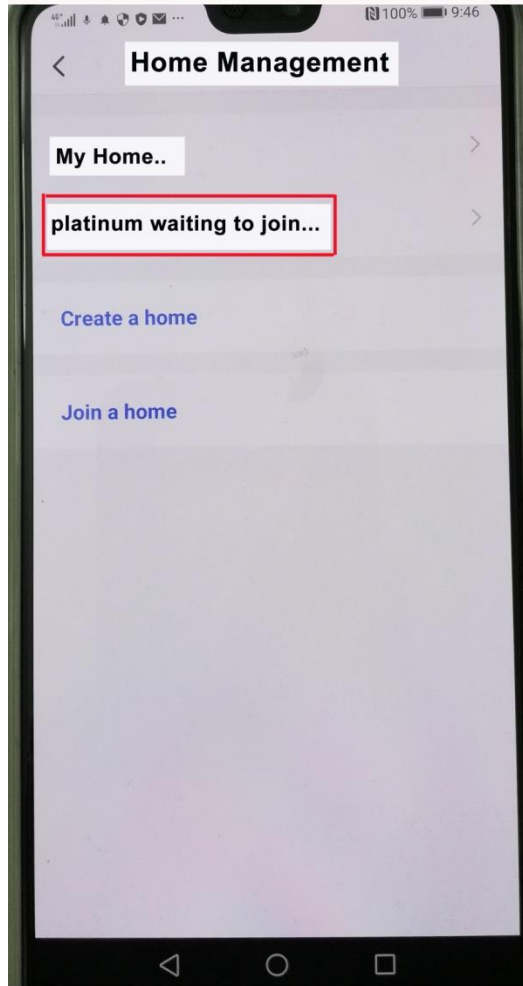

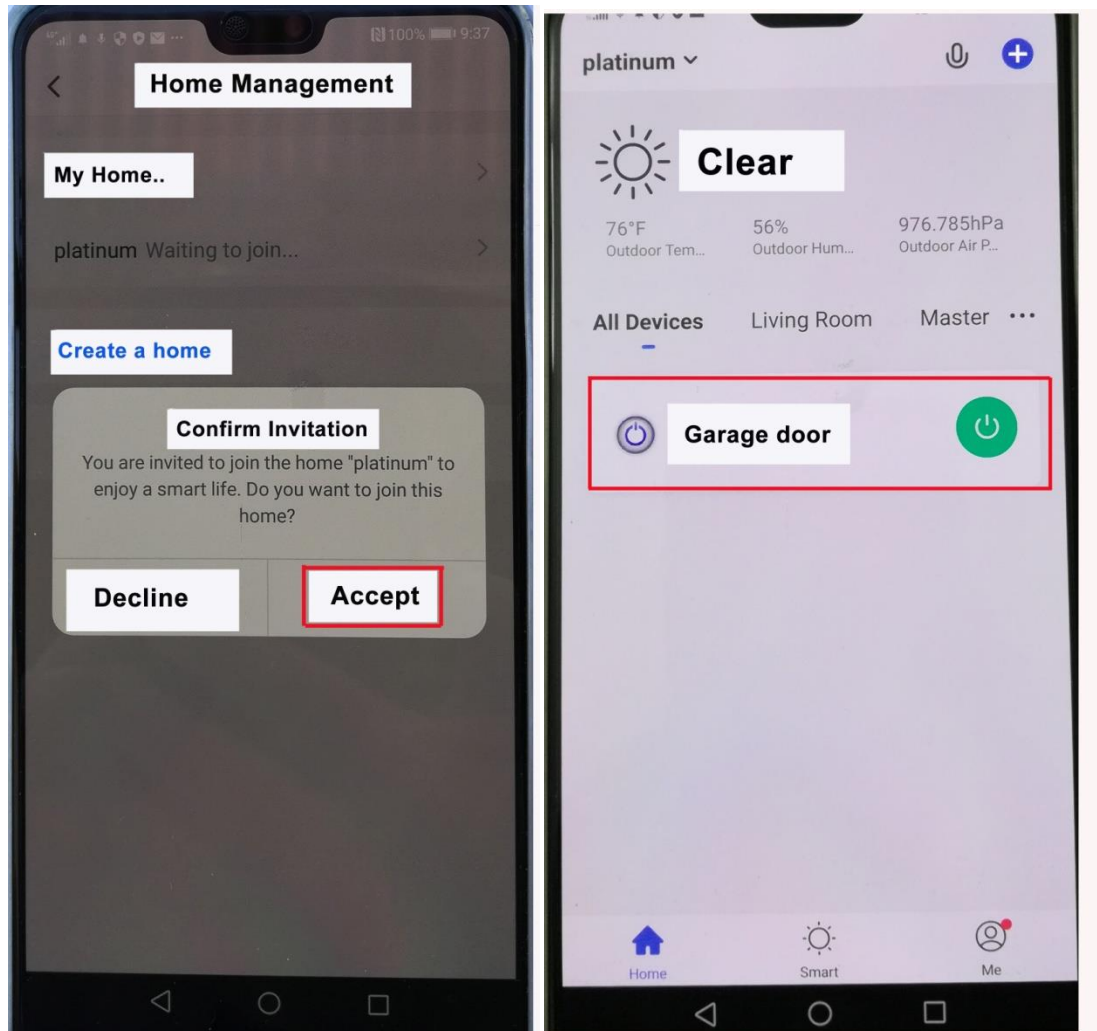


11. Next new user needs to tap **Home Management** icon in Me page.
12. Next new user needs to tap the invitation message. In this example the invitation message is “platinum Waiting to join...”.
13. Next new user needs to tap the “**Accept**” icon. Adding one user process is completed.
14. Use the same process to add more users.

Note 1: Make sure the Family name, the room Management, and Family Location is the same for every phone in this family setup.




Note 2: Each User also needs to install Smart Life APP first in order to receive the invitation message from Home Owner, or Administrator.

## How To Delete Users


1. Open Smart Life APP.

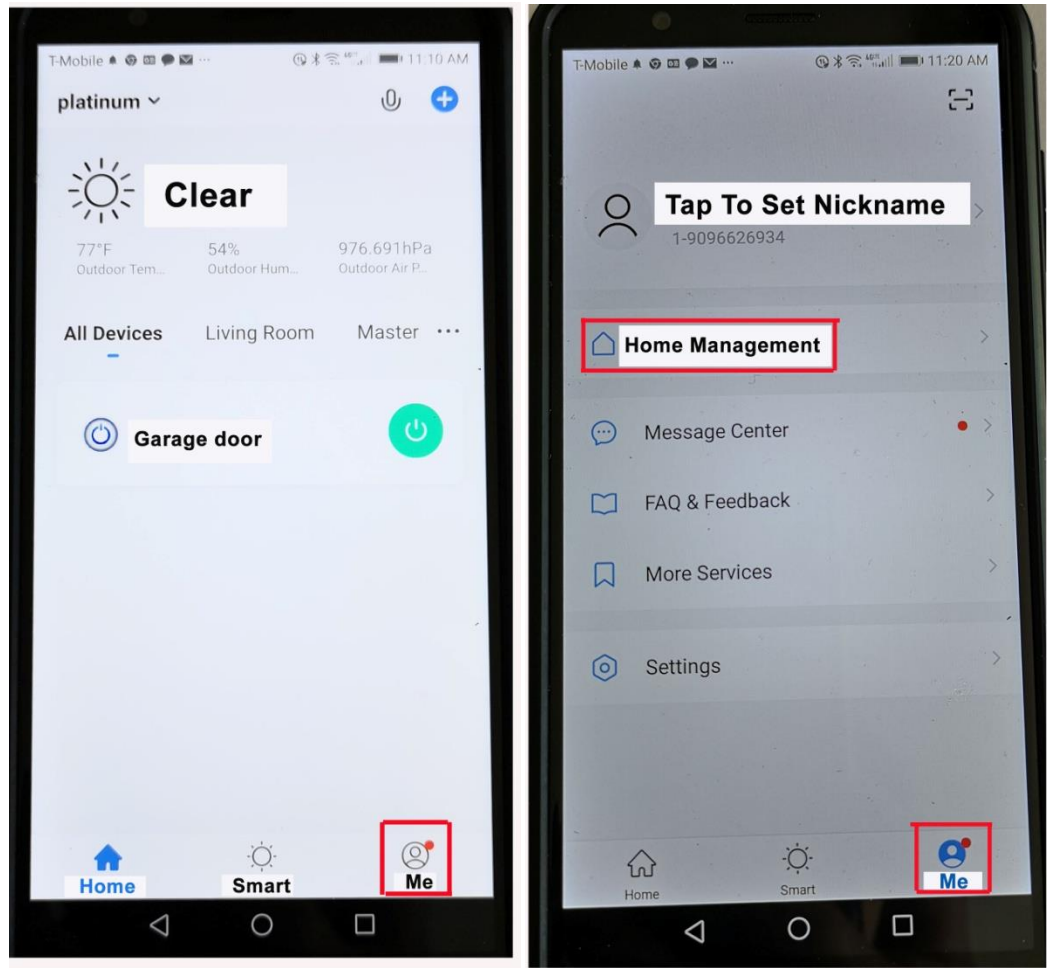

2. Press **Me** Icon once.
3. Press **Home Management** Icon once.

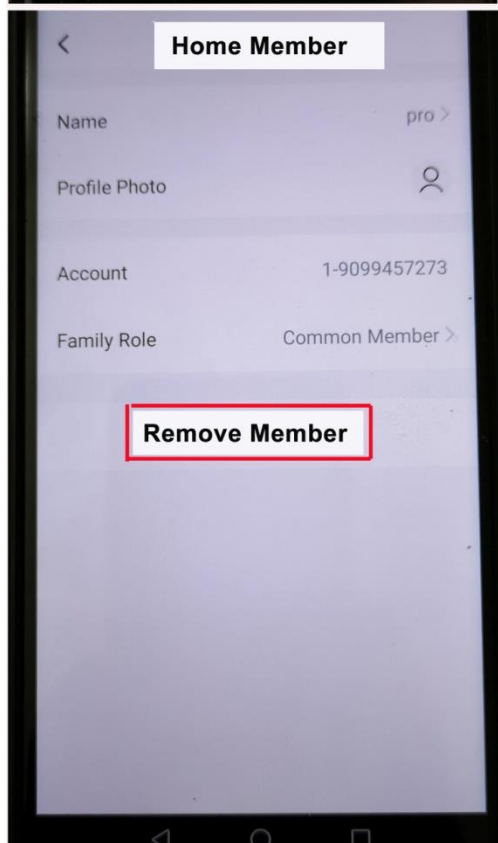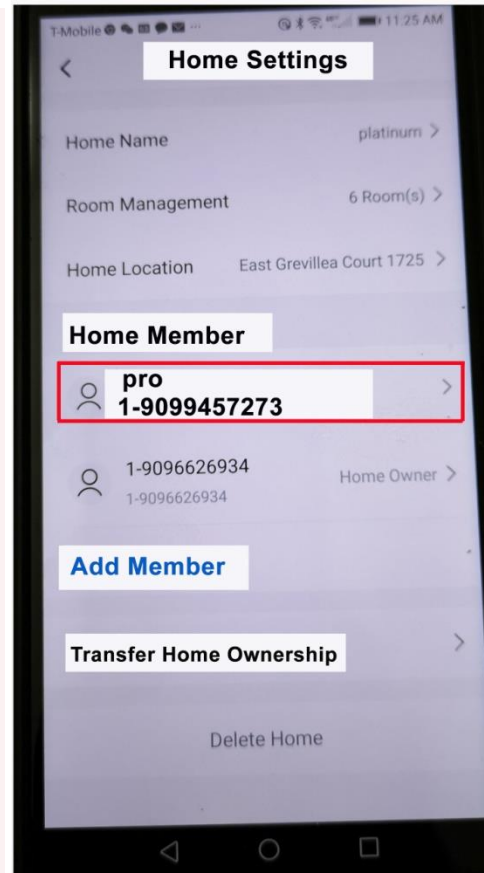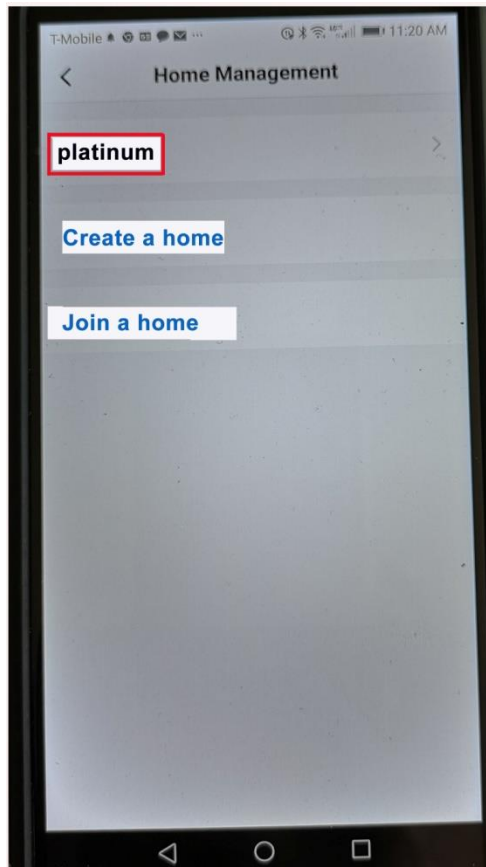


4. Press Family Name Icon once("platinum" is the family name in this example.Do not press Add Family Icon).
5. Press the user name that you want to remove("pro" is the user name in this example).
6. Tap **Remove Member** icon .

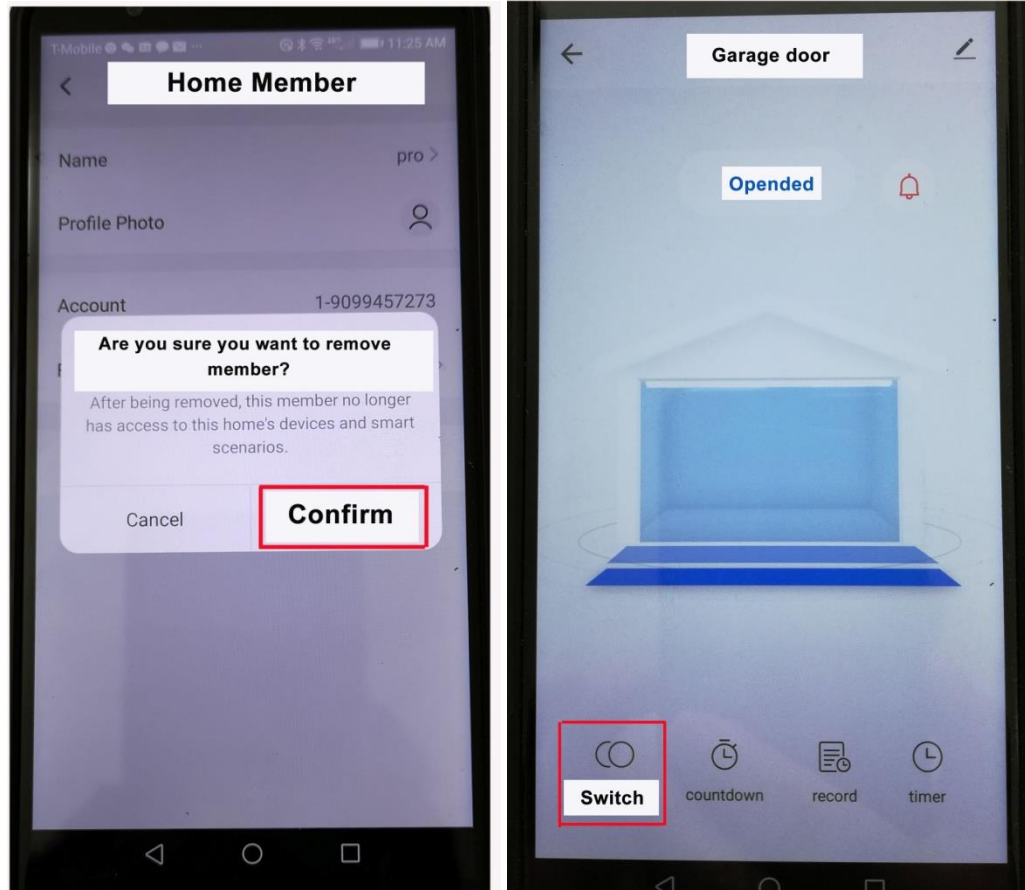

7. Tap **Confirm** icon to remove the user. Remove user process is completed.

## How to Open/Close Gate

1. Open Smart Life APP.

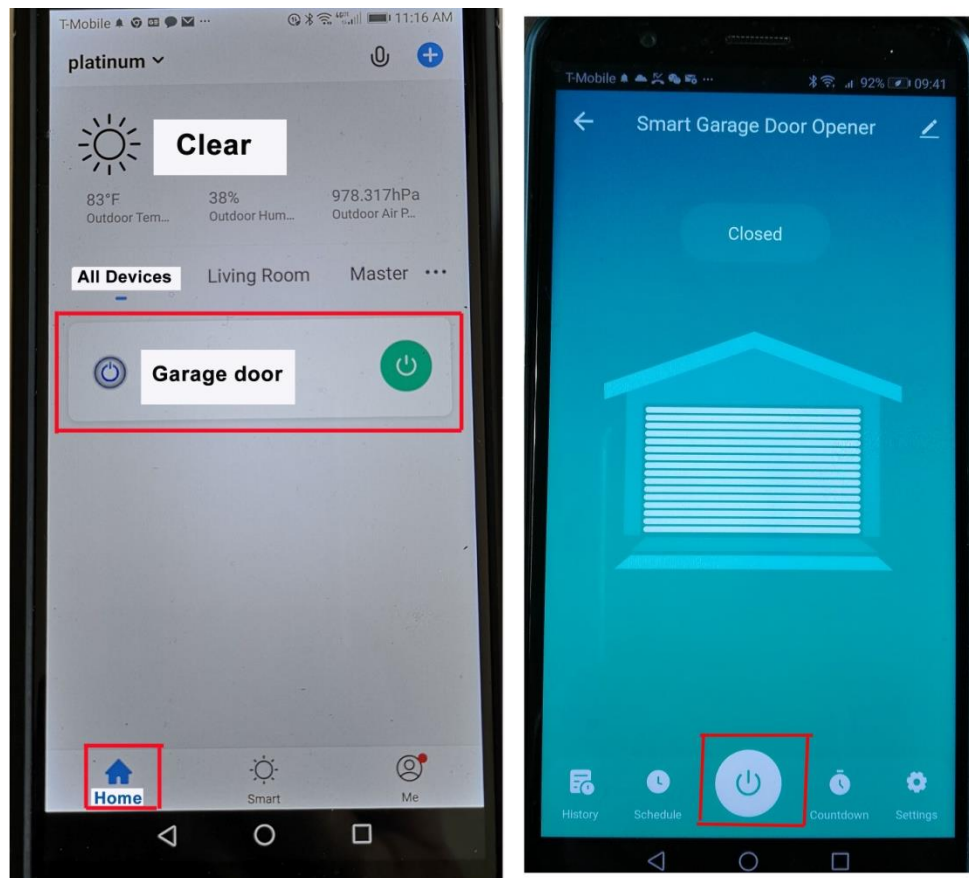


2. Tap icon **"Garage door # (This is a numerical number)"** once to go to garage door page.
3. Tap the bottom middle **"OPEN"** icon to open, or close the gate.

## How To Set Gate Open Duration Time

**Note:** You need to set the Operator main board Timer OFF in order for this function to work.


1. If the gate is open now. And you want set the gate to close in 2 hours and 30 minute from now. Here are the steps that you need to set this up.
2. Open Smart Life APP in Home page.
3. Tap icon "Garage door #" to open Gage door page.

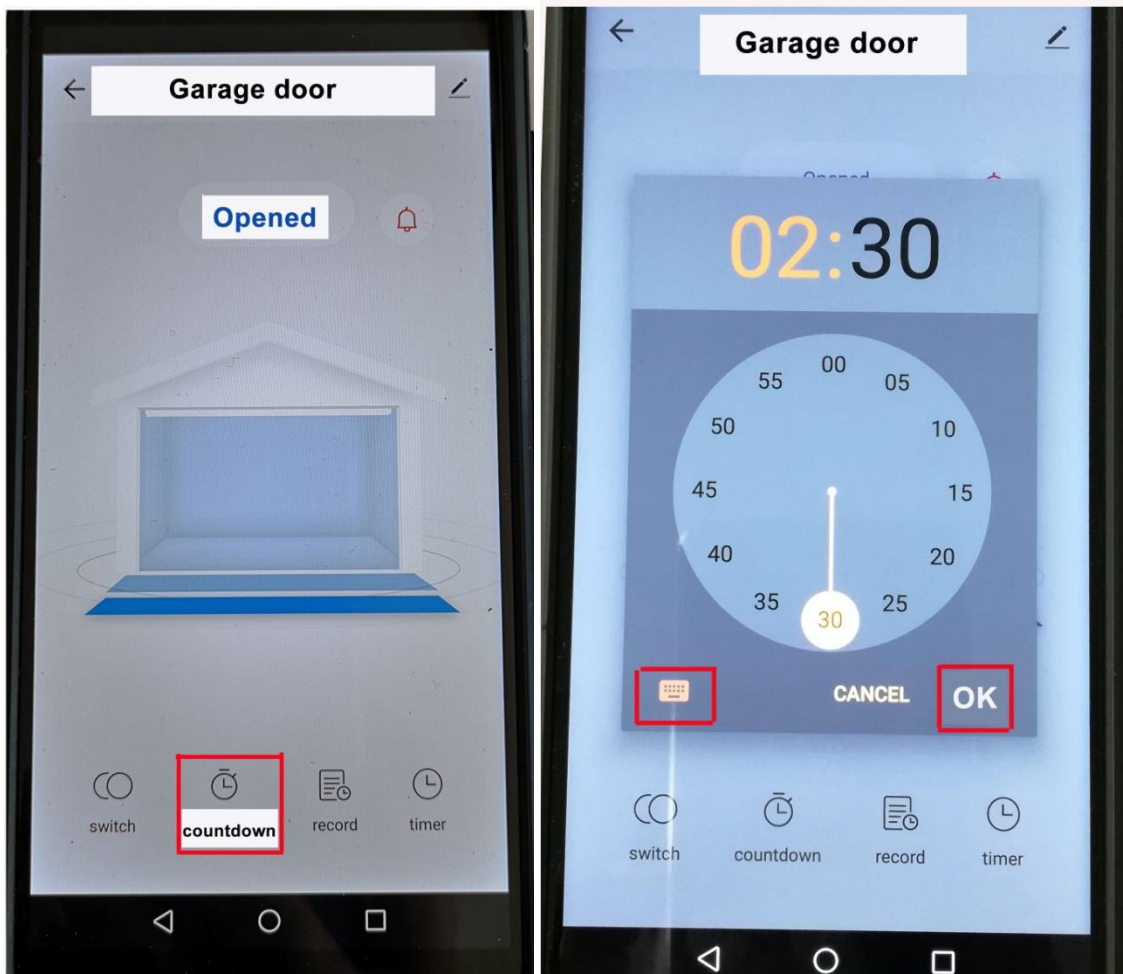

4. Tap icon "Countdown" to set the open duration time.
5. Tap the square icon at the bottom left of the clock.
6. Enter 02:30.
7. Tap icon "OK"
8. You are set now. Gate will close in 2 hours and 30 minutes from now.

## How To Set Gate Close Duration Time

1. If the gate is close now. And you want set the gate to open in 2 hours and 30 minute from now. Here are the steps that you need to set this up.
2. Open Smart Life APP in Home page.
3. Tap icon "Garage door" to open Gage door page.
4. Tap icon "**Countdown**" to set the close duration time.
5. Tap the square icon at the bottom left of the clock.

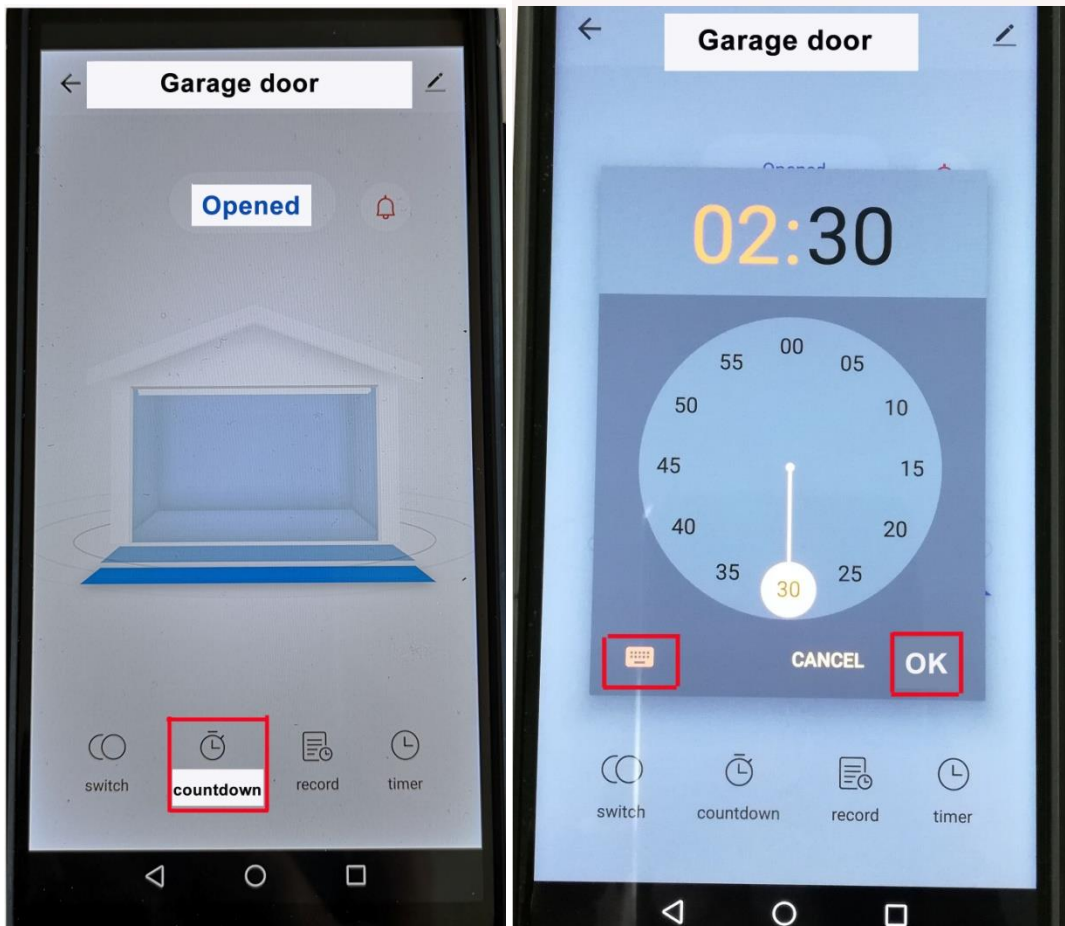


6. Enter 02:30.
7. Tap icon "OK"
8. You are set now. Gate will open in 2 hour and 30 minutes from now.

## How To Set Schedule


**Set gate open from 8:00AM to 5:00PM for  
Mon, Tu, We, Th, FR**

**Note:** In order to use this function, you need to set Operator main board Timer OFF and connect the Wi-Fi Gate Opener Device to Radio terminal. One wire connects to the RAD pin, the other wire connects to GND pin.


1. Open Smart Life APP in Home page.
2. Tap icon "Garage door #" to open Gage door page.

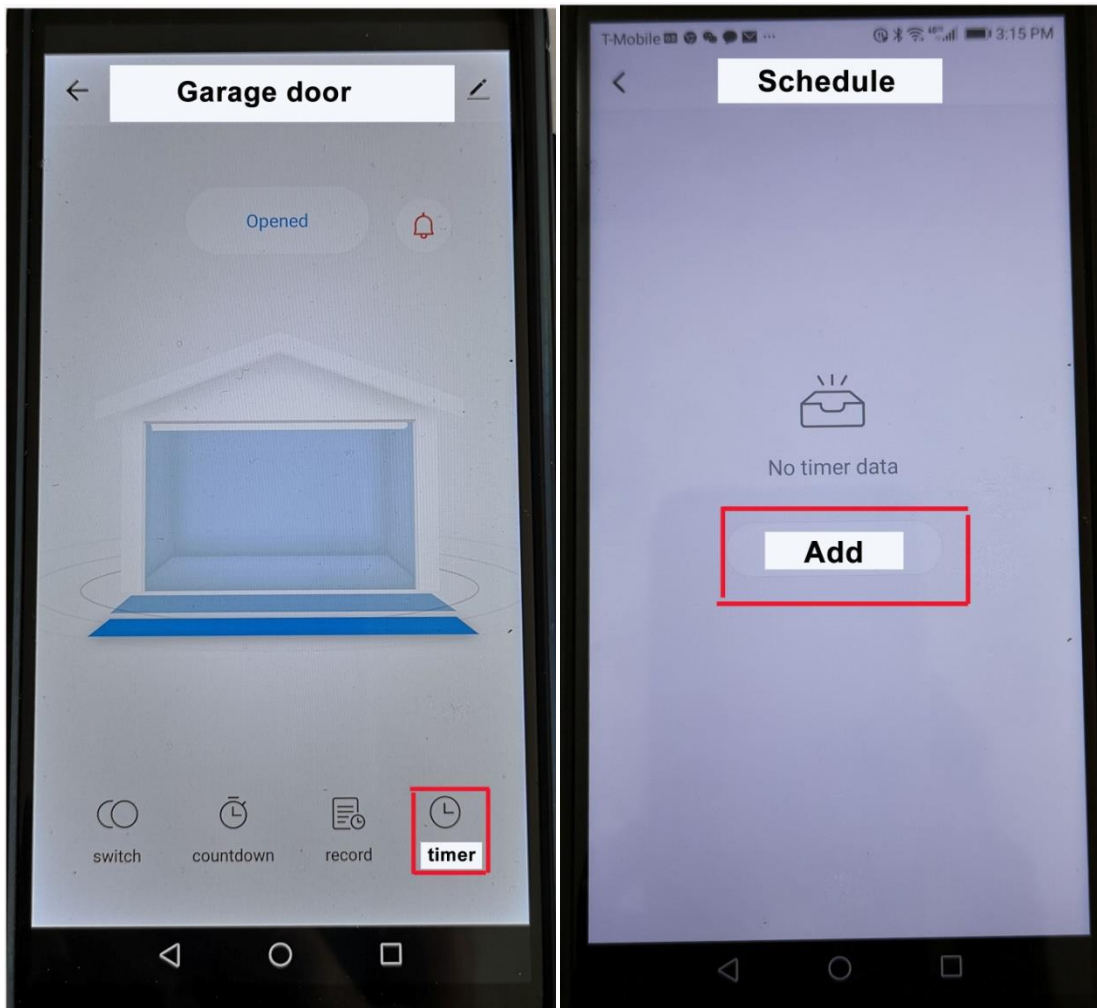


3. Tap icon “Timer” go to Add Schedule page
4. Tap **Add** icon.

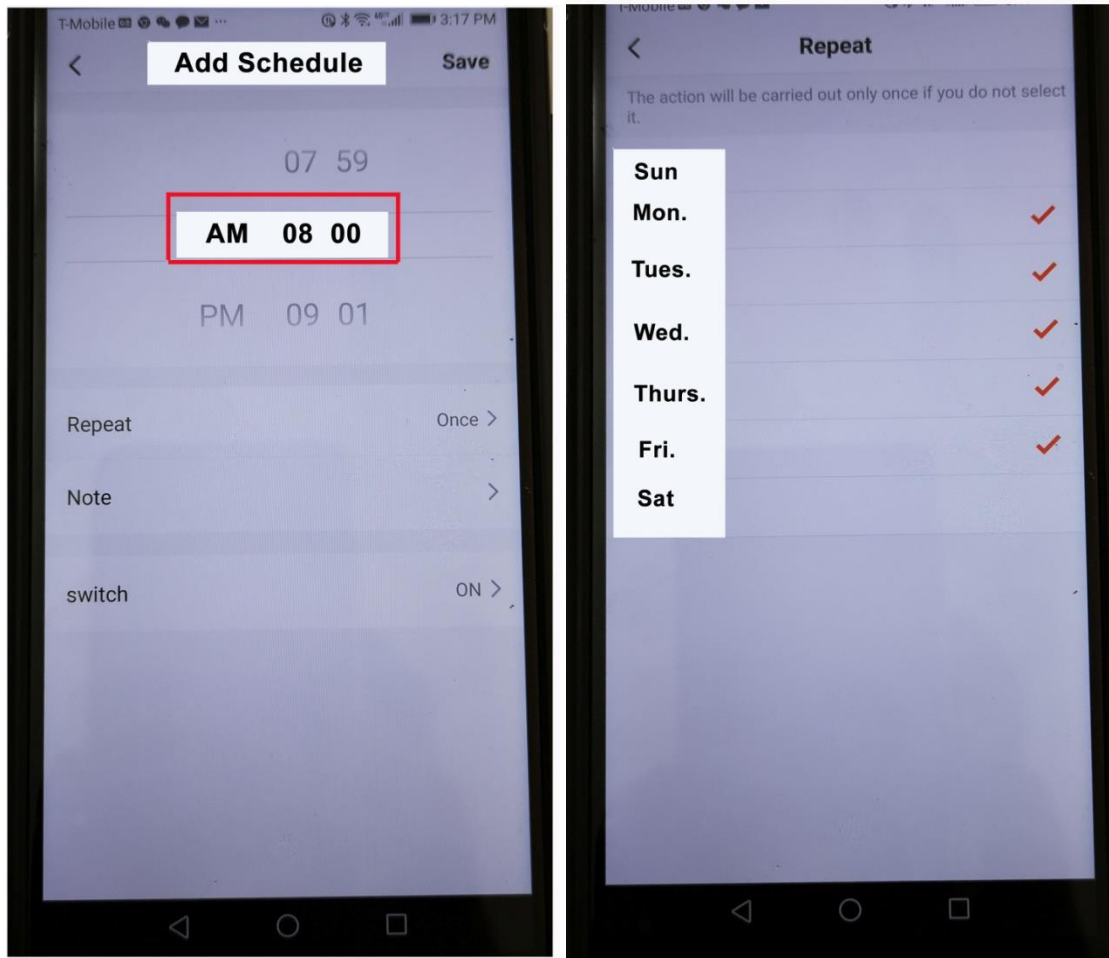

5. Move AM between the setting lines in the 1<sup>st</sup> column.
6. Scroll 08 between the setting lines for hour in the 2<sup>nd</sup> column.
7. Scroll 00 between the setting lines for minute in the 3<sup>rd</sup> column.
8. Tap Icon “repeat” to go to repeat page.
9. Tap Monday, Tuesday, Wednesday, Thursday, and Friday once to check these days.
10. Tap icon back-page at the top left corner to go back to Add Schedule page.
11. Tap Icon “Switch” and select ON.
12. Tap Icon “Save” to save this setting.
13. Tap “Add Schedule” at the bottom of the Add Schedule page.

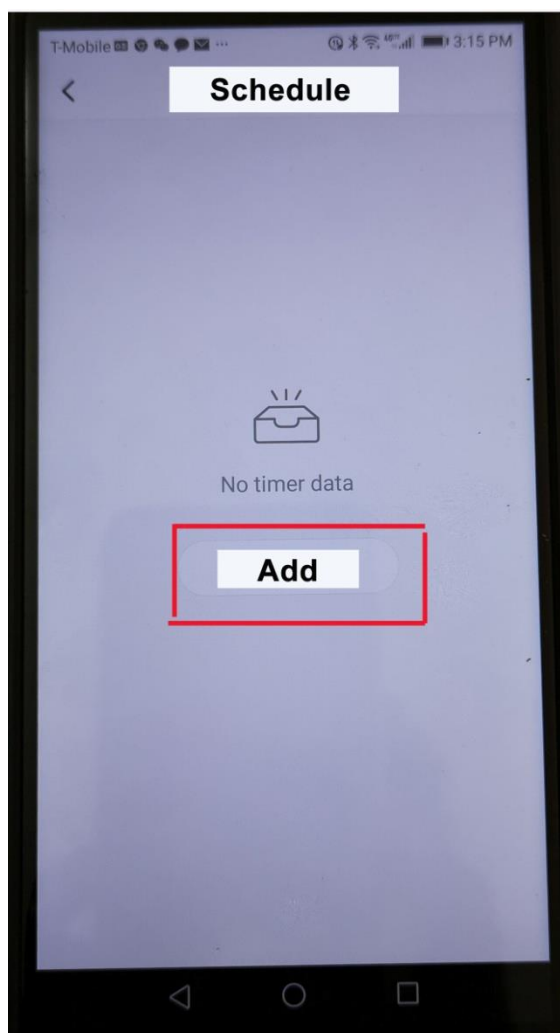


14. Move PM between the setting lines in the 1<sup>st</sup> column.
15. Scroll 05 between the setting lines for hour in the 2<sup>nd</sup> column.
16. Scroll 00 between the setting lines for minute in the 3<sup>rd</sup> column.
17. Tap Icon “repeat” to go to repeat page.

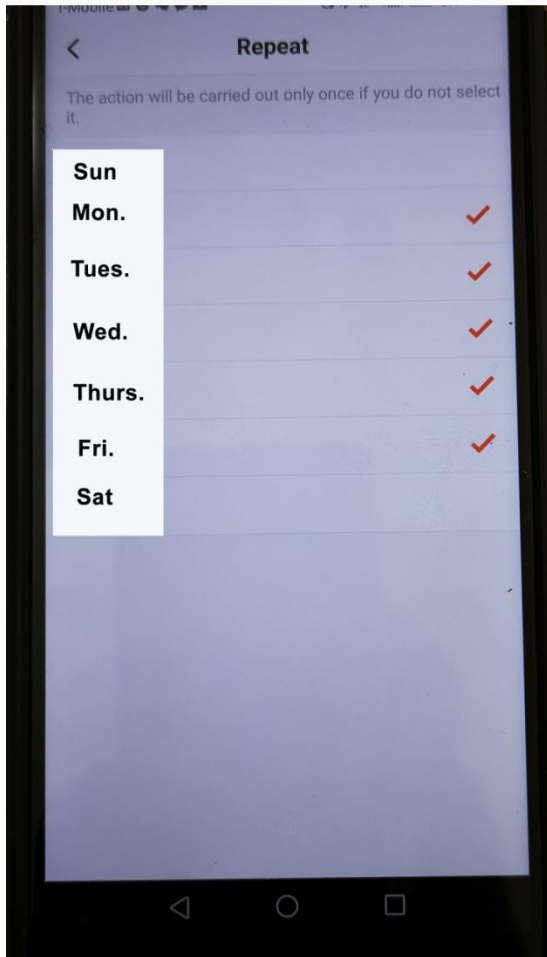

18. Tap Monday, Tuesday, Wednesday, Thursday, and Friday once to check these days.
19. Tap icon back-page at the top left corner to go back to Add Schedule page.
20. Tap Icon **"Switch"** and select ON.
21. Tap Icon **"Save"** to save this setting. Now the schedule setting is completed.



## Connect Wi-Fi Gate Opener Wires To Close Limit Switch To Check Gate Status

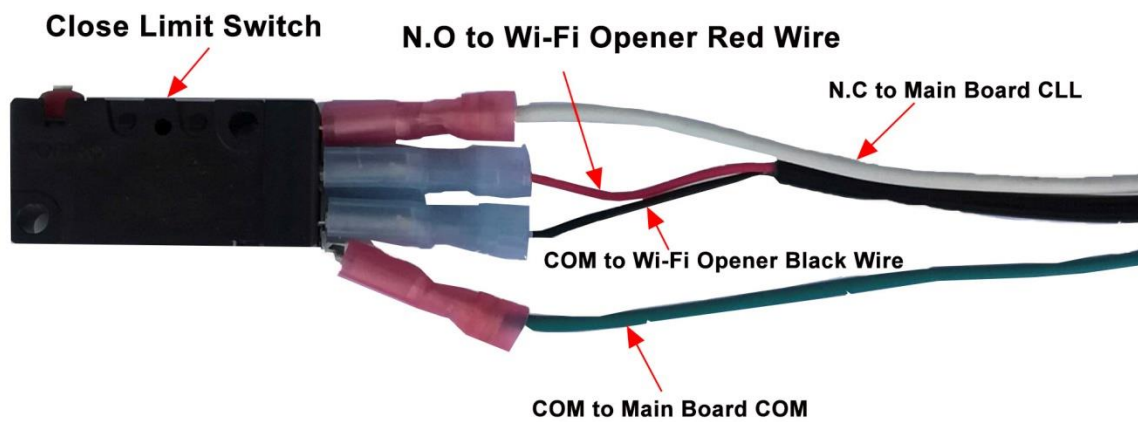

**Figure show how to connect Wi-Fi Gate Opener to Close Limit Switch**

1. Connect the Wi-Fi Gate Opener small red wire to N.O on the Close Limit Switch.
  2. Connect Wi-Fi Gate Opener small black wire to COM on the Close Limit Switch.
- Note: Once the connection is correct. Open the Wi-Fi device page. On the Top of the main screen it shows the gate is currently open, or close.